



STAPA®  
STANDART®


Zinc pastes and  
Zinc flake powders  
for corrosion protection

## Corrosion protection with STAPA® Zinc pastes, STANDART® Zinc flake powders and Zinc granules

### Production process

The raw material for the flakes is atomized, irregular Zinc granules with a minimal purity of 99.995 acc. to DIN 1706 which is milled into lamellar particles in ball mills in the presence of a lubricant in white spirit. The pigment suspension produced after milling is screened, pressed on filter presses and homogenized in mixers to the standard combination of 90% solids and 10% solvent.

The same raw material is also used in a dry milling process in the presence of a lubricant to get flake-shaped Zinc powders.

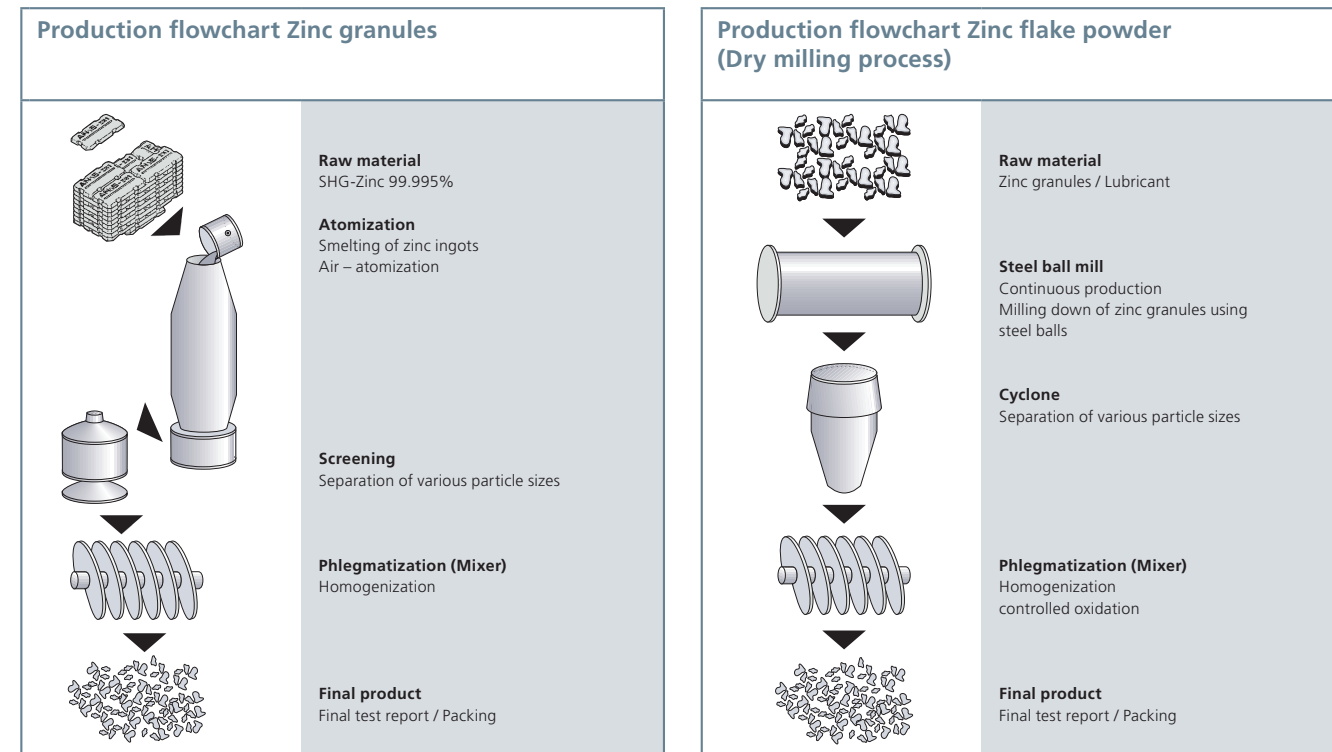

## Corrosion protection with STAPA® Zinc pastes and STANDART® Zinc flake powders

ECKART is a leading international manufacturer of metallic and pearlescent pigments for the paints and coatings industry, the graphic arts industry, the plastic, lightweight concrete and the cosmetic industry.

In the paint industry one of the most important corrosion protection applications are anti-corrosive coatings, wherein lamellar Zinc powders and pastes are used as functional pigments.

The anticorrosive properties of zinc have been well-known for decades; thousands of tons of Zinc dust are yearly used to protect goods and constructions everywhere in the world.


The development of Zinc flakes began back in the 70s, initiated by the desire for anti-corrosive pigments for thin films which offer good corrosion protection under mechanical loads. For a producer of diverse lamellar metalpigments like ECKART it was obvious to manufacture also lamellar (flake-shaped) Zinc pigments to fulfill these requests. Actually the main application field for Zinc flakes is still the coating of mass goods in a special dip coating process.

With the zinc pastes and zinc powder portfolio, ECKART offers solutions to meet the requirements of high-quality products with outstanding corrosion protective properties.


Zinc flake pigments	Alloy composition	Non volatile content (pigment)	Volatile content (solvents)	Type of solvents	Bulk density (typical value)	Screen analysis/wet sieving with organic solvents as rinsing liquid	Typical characteristics of particle size distribution
	%	acc. to DIN 55923 ± 2%	acc. to DIN 55923 ± 2%	*	appr. (kg/l)	acc. to DIN 53196 <45 µm min. %	determined with Cilas 1064 D50 approx. [µm]
<b>STANDART® Zinc – Powders</b>							
Zinc flake TV	Zn: 100**	100	-	-	1.4	97.0 @ <71 µm	50
Zinc flake AT	Zn: 100**	100	-	-	1.0	97.0	20
Zinc flake GTT	Zn: 100**	100	-	-	0.8	98.0	13
Zinc flake UFB	Zn: 100**	100	-	-	1.4	97.0	5
<b>STAPA® Zinc – Pastes</b>							
Zinc 4	Zn: 100**	90	10	TE	-	97.0	14
Zinc 8	Zn: 100**	90	10	TE	-	99.0	11
<b>STAPA® Zinc – Alloys</b>							
4 ZnAl3	Zn: 97, Al: 3	91.5	8.5	TE	-	97.0	14
4 ZnAl7	Zn: 93, Al: 7	91.5	8.5	TE	-	97.0	14
4 ZnSn15	Zn: 85, Sn: 15	91.5	8.5	TE	-	97.0	14
4 ZnSn30	Zn: 70, Sn: 30	91.5	8.5	TE	-	97.0	14
15 ZnMg26	Zn: 74, Mg: 26	85.0	15.0	TE	-	99.0	15

\* TE = Mineral spirit, other solvents available on request


\*\* Zinc is 99,995% pure

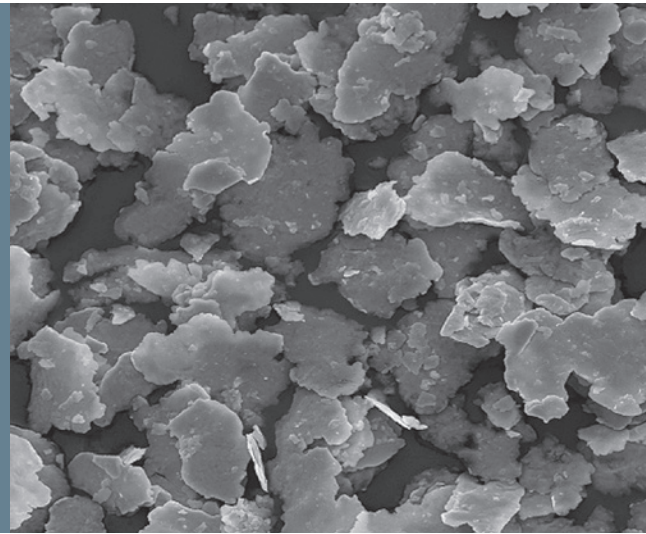


Zinc powder (450x)

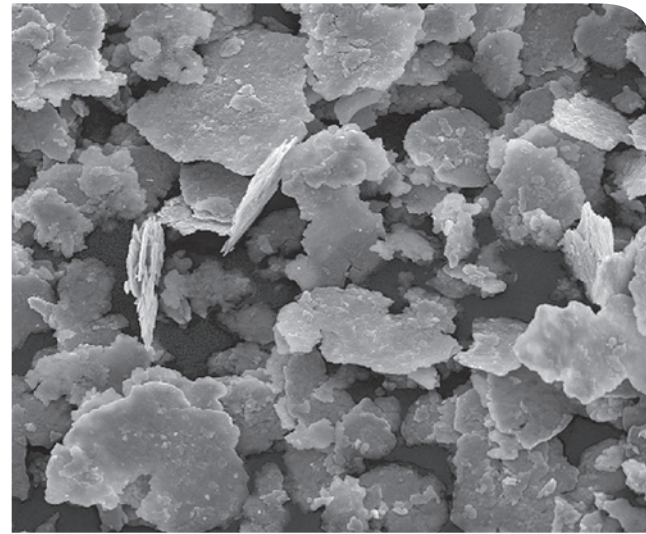

Zinc paste (450x)

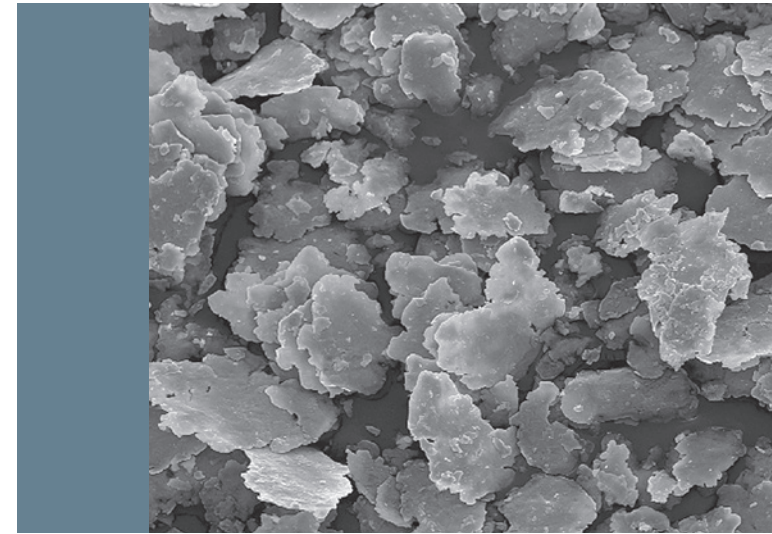

Zinc flake (450x)

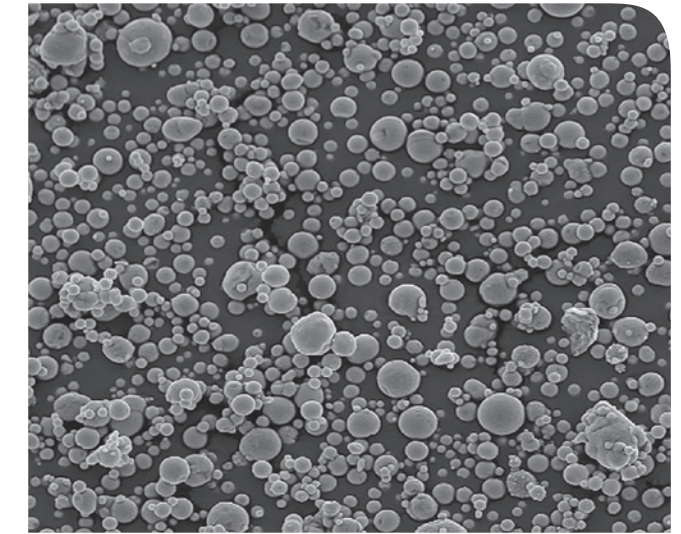

Zinc dust (450x)

#### Mode of action of Zinc flakes

Apart from the cathodic corrosion protection provided by Zinc, Zinc flakes offer the additional advantage of excellent barrier protection. Cathodic corrosion protection is guaranteed by factors including conductive contact between Zinc and the steel surface and between the Zinc particles themselves. Whereas spot contact with relatively high resistance is achieved with Zinc dust particles, Zinc flakes have twodimensional contact which brings about a higher current density and hence a better anti-corrosive effect, though it can also lead to more rapid degradation of unprotected

Zinc flakes. To counteract this, fillers in flake form and/or additional anti-corrosive pigments are often incorporated in the formulation.


Due to their platelet-like structure, flakes have a markedly larger surface area than spherical Zinc dust. The correspondingly higher binder uptake allows formulations with a lower pigment volume concentration (PVC), which in turn leads to favourable application and paint properties.

#### Paint properties, application and handling

Especially the large surface area/high binder uptake, which means less need of Zinc in the formulation lead to a lot of advantages:

- Greater flexibility
- Better substrate and intercoat adhesion
- Good overcoating properties
- Low porosity and permeability
- Smooth surface area
- Metallic appearance
- Lower settling tendency
- Sediment easier to stir up
- Less Zinc to store / to handle
- Higher productiveness
- Less Zinc need per m<sup>2</sup> → ecological advantage

The use of Zinc flakes offers predominantly technical and ecological advantages without any economic drawbacks.

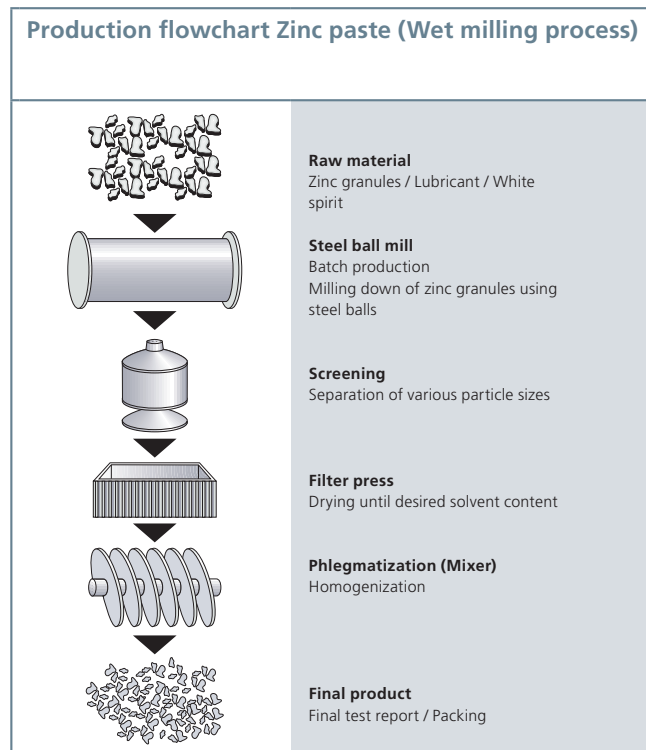

#### Zinc dust and Zinc flakes

Technical data	Zinc dust	Zinc flake
Particle shape	spherical	lamellar
Density	appr./2.2 kg/l	appr./1.1 kg/l
Oil absorption value	appr. /6.5 g/100 g	appr./22 g/100 g
Medium particle size	appr./3 µm	appr./15 µm
Specific surface area	small	large
Binder requirement	low	high
PVC	high	low

For further information or guiding formulations please contact our technical department: [info.eckart@altana.com](mailto:info.eckart@altana.com)



ECKART Suisse SA  
Route du Camping 2  
1963 Vétroz, Switzerland  
Tel +41 27 345 48 00  
Fax +41 27 345 48 59  
info.eckart.switzerland@altana.com  
www.eckart.net

With compliments

ECKART GmbH  
Guentersthal 4  
91235 Hartenstein, Germany  
Tel +49 9152 77-0  
Fax +49 9152 77-7008  
info.eckart@altana.com  
www.eckart.net

ECKART America Corporation  
4101 Camp Ground Road  
Louisville, Kentucky 40211, USA  
Tel +1 502 775-4241  
Fax +1 502 775-4249  
Toll-free 877 754 0001  
info.eckart.america.ky@altana.com  
www.eckart.net

ECKART Asia Ltd.  
Unit 3706-08, 37/F, Sunlight Tower  
248 Queen's Road East  
Wan Chai, Hong Kong  
Tel +852 3102 7200  
Fax +852 2882 5366  
info.eckart.asia@altana.com  
www.eckart.net

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility.

0.5/August2018.12 FA  
099137XX0